

Lenses for image circle 22 mm

Xenoplan 2.0/28

These high-resolution, high-speed lenses are optimized for the use of 4 and 8 megapixel 1.3" sensors. The image circles are very large for C-Mount lenses. With a 1.3" sensor, the relatively short focal lengths allow a large coverage range at a short working distance. The lenses are also broadband coated and can be used in the visible range 400 – 700 nm or the near infrared range 700 – 1000 nm.



Xenoplan 2.0/28

Key Features

- Lens for sensor sizes up to 1.3"(image circle 22 mm)
- Designed for 4 Mpix sensors
- High resolution optics 400 - 700 nm (VIS) / 700 - 1000 nm (NIR)
- Very high MTF across the entire sensor
- Robust mechanics for industrial environment
- Compact and low weight
- Focus and iris setting lockable



Applications

- Machine Vision and other imaging applications
- 3D measurement
- Traffic
- Etc.

Technical Specifications


F-number	2.0
Focal length	29,3 mm
Image circle	22 mm
Transmission	400 - 1000 nm
Interface	C-Mount
Weight	78 gr.
Option	Optical filter
Code No.	1001972

Xenoplan 2.0/28

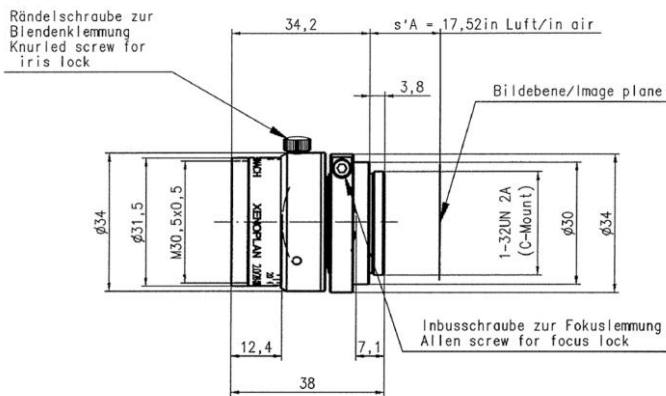

XENOPLAN 2.0/28


$f' = 29,3 \text{ mm}$	$\beta_p' = 1,041$
$s_F = -16,3 \text{ mm}$	$s_{EP} = 11,8 \text{ mm}$
$s_{F'} = 20,8 \text{ mm}$	$s_{AP} = -9,7 \text{ mm}$
$HH' = -2,9 \text{ mm}$	$\Sigma d = 18,5 \text{ mm}$

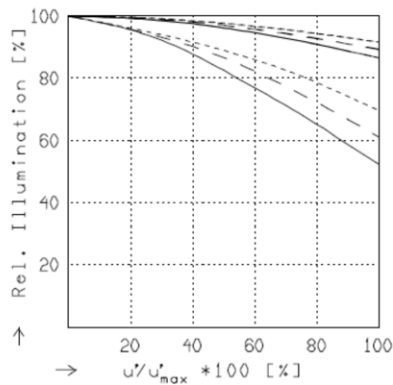

RELATIVE ILLUMINATION

The relative illumination is shown for the given focal distances or magnifications.


$f / 2,0$	$f / 4,0$	$f / 8,0$
$\beta' = -0,2000$	$u'_{\max} = 10,9$	$00' = 208.$
$\beta' = -0,3333$	$u'_{\max} = 10,9$	$00' = 153.$
$\beta' = -0,5000$	$u'_{\max} = 10,9$	$00' = 129.$

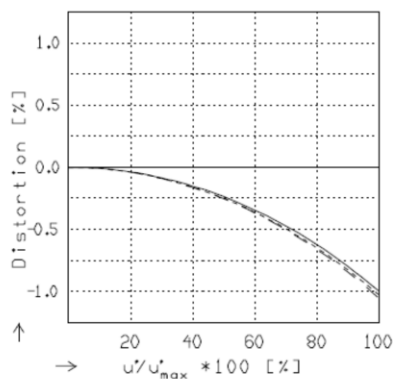

DISTORTION

Distortion is shown for the given focal distances or magnifications. Positive values indicate pincushion distortion and negative values barrel distortion.

$\beta' = -0,2000$	$u'_{\max} = 10,9$	$00' = 208.$
$\beta' = -0,3333$	$u'_{\max} = 10,9$	$00' = 153.$
$\beta' = -0,5000$	$u'_{\max} = 10,9$	$00' = 129.$

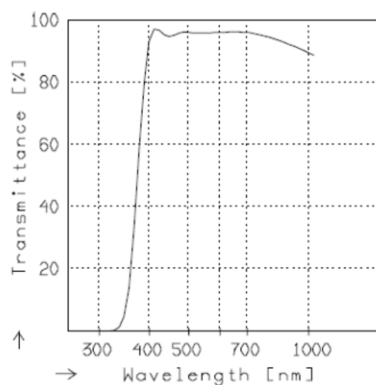

TRANSMITTANCE

Relative spectral transmittance is shown with reference to wavelength.




Xenoplan 2.0/28

XENOPLAN 2.0/28

MODULATION with reference to the relative image height

Wavelength λ	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19,6	23,7	22,2	15,7	12,1	6,7
Spatial frequency R	[1/mm]	10	20	40			
Format	[mm X mm]	15,2	X 15,2				
Diagonal $2u'$	[mm]	22,0					

radial —
tangential - -

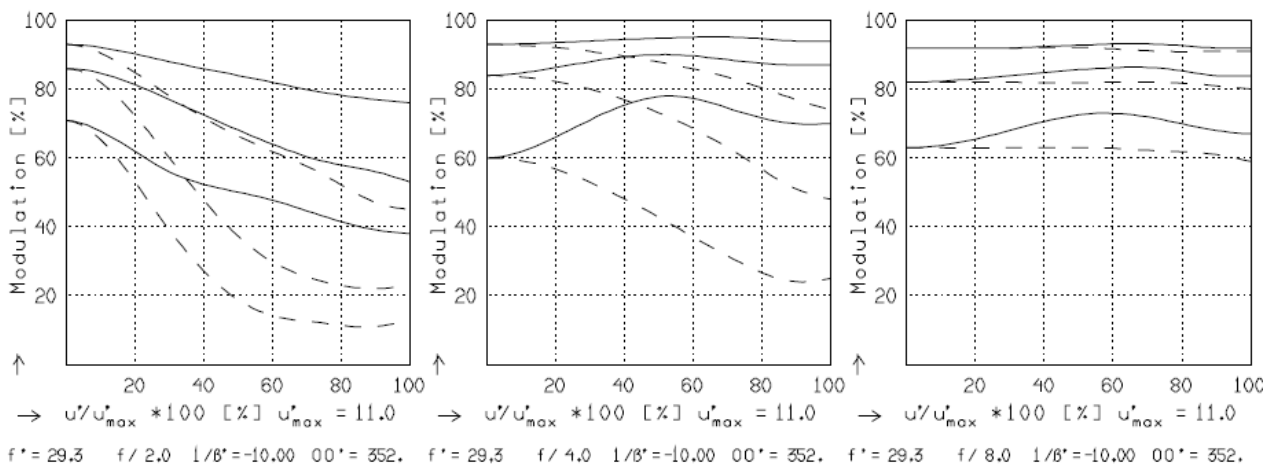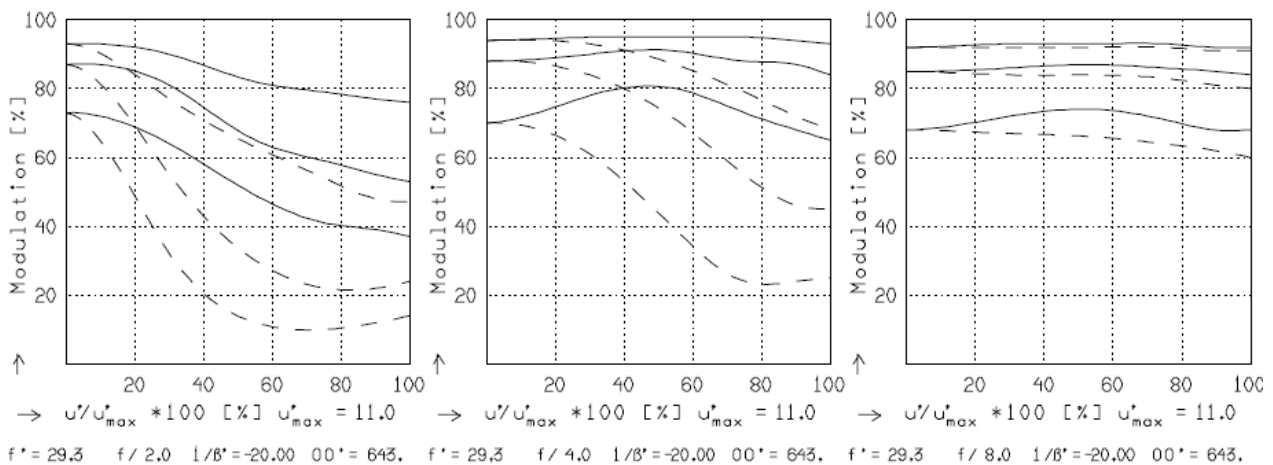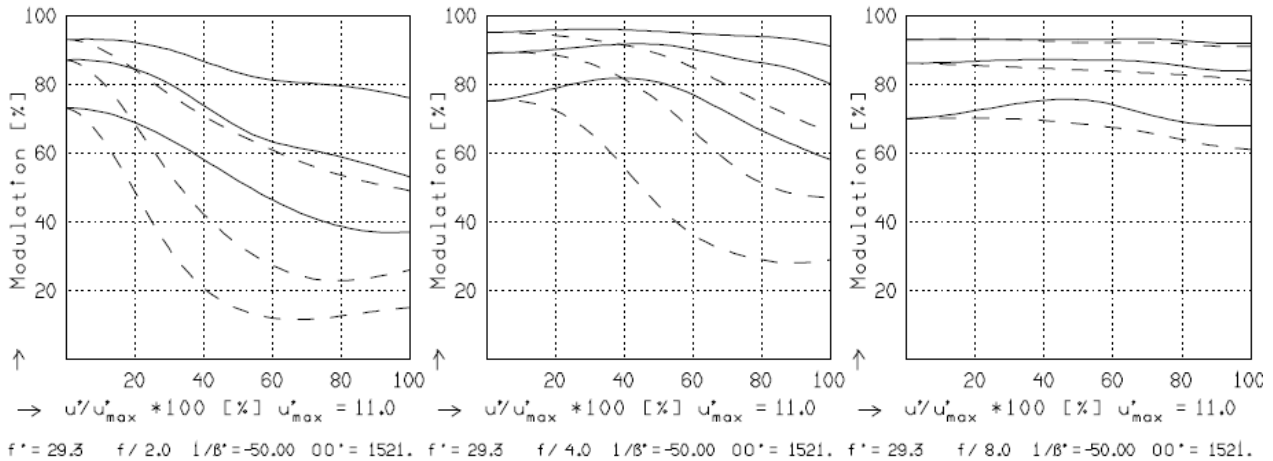

Focusing : MTF_{max} at $f / 2.0$, $R = 40$ 1/mm, $u'/u'_{max} = 0$




Xenoplan 2.0/28

XENOPLAN 2.0/28

MODULATION with reference to the relative image height

Wavelength λ	[nm]	555	655	605	505	455	405
Spectral weighting	[%]	19.6	23.7	22.2	15.7	12.1	6.7
Spatial frequency R	[1/mm]	10	20	40			
Format	[mm X mm]	15.2	X 15.2				
Diagonal $2u'$	[mm]	22.0					

radial —
tangential - -

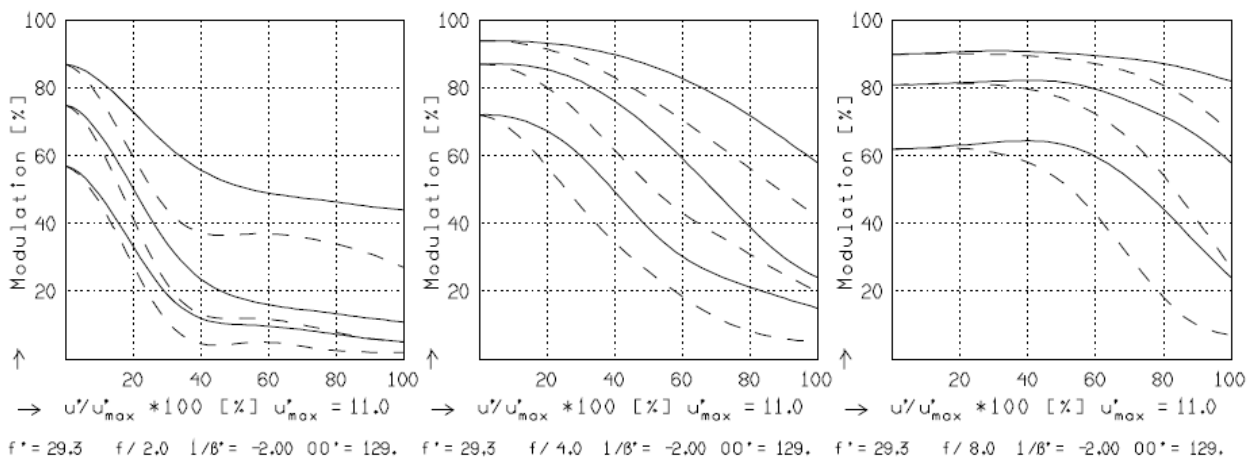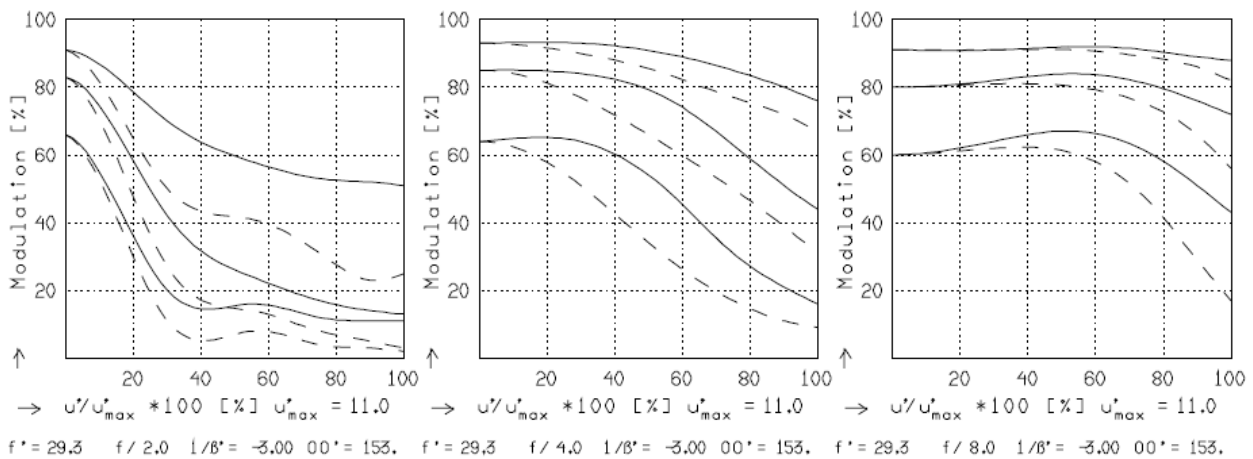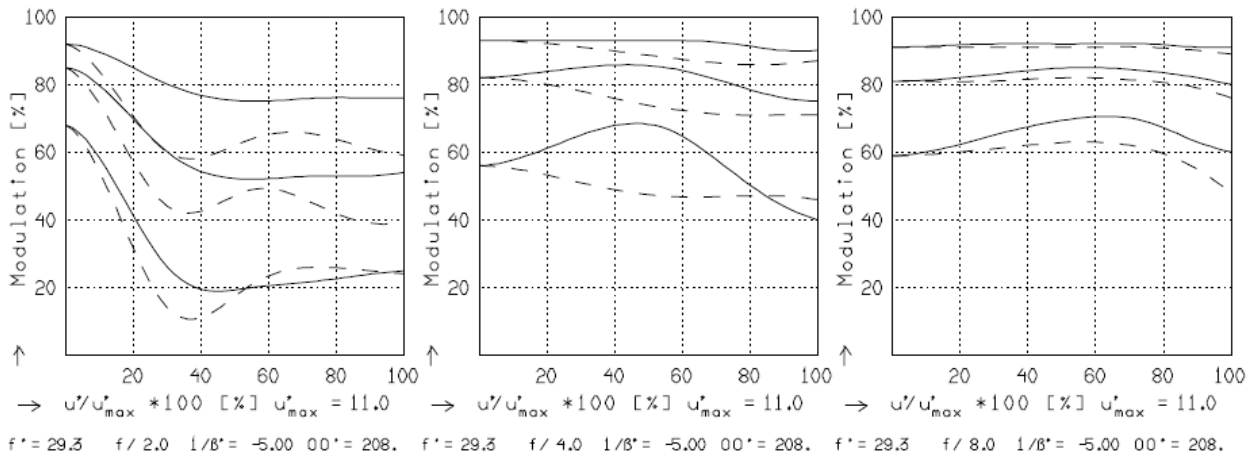

Focusing : $MTF_{\max}$ at $f / 2.0$, $R = 40$ 1/mm, $u'/u'_{\max} = 0$