


W-04CDB3 1/3" Multi-function Board Camera with Varifocal Lens

High functionality and high sensitivity for demanding scene conditions

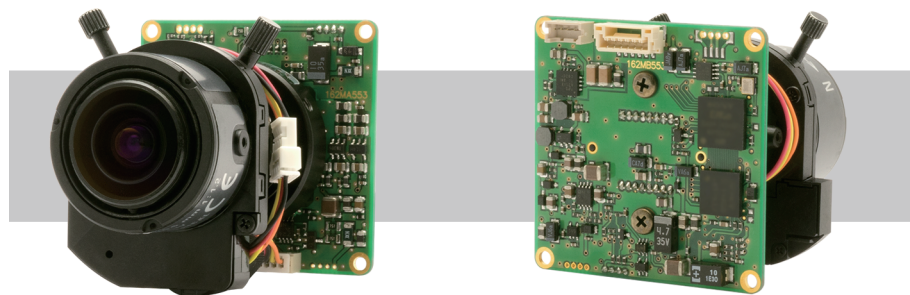


*NO CE & FCC

Key features

- 1/3-inch CCD sensor with high sensitivity 0.005 lx F1.2 and resolution 650TVL
- Advanced setting available by OSD (On-Screen Display) through an optional remote control
- 2DNR, privacy masking, BLC (Back Light Compensation)
- Mirror image, white blemish correction, contour correction
- Built-in vari-focal lens (f=2.8 – 10.5mm)

Dimensions

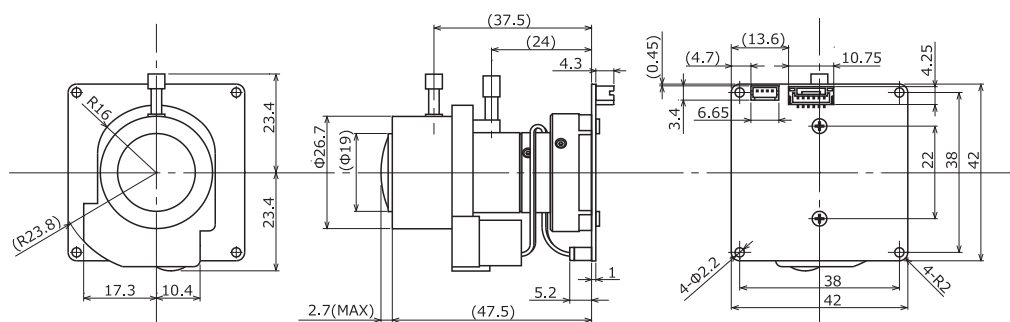

Specifications

Video standard		NTSC
Pick-up element		1/3 inch interline transfer CCD image sensor
Number of effective pixels		976(H) × 494(V)
Unit cell size		5.4μm(H) × 7.4μm(V)
Imaging system		Ye, Cy, Mg, and G complementary color mosaic filters on chip
Synchronizing system		Internal
Scanning system		2:1 Interface
Video output		Composite: 1.0 V(p-p) 75Ω (Unbalanced)
Resolution (H)		More than 650TVL (Center)
Minimum illumination		0.005 lx F1.2 (AGC ON=45dB, Shutter=OFF)
S/N		More than 52dB (AGC OFF=-3dB, γ≒0.45)
Function settings		OSD : Remote controller
AE mode	Fixed	1/60, 1/100 sec.
		1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 sec.
	EI	1/60 - 1/100000 sec.
White balance		ATW, AWB, ACR, PWB, MWB, PRESET (5100K, 6300K)
AGC	ON	-3 - 45dB
	OFF	-3dB
MGC		0 - 42dB (6dB step)
Day/Night		Digital Auto, Manual
Gamma characteristics		γ≒0.45
Video level		Adjustable
Noise reduction		2DNR OFF/ON Level adjustable
Wide dynamic range		D-WDR OFF/ON Level adjustable
Lens iris		Video / DC
Back light compensation		BLC, HSBL
White blemish correction		Up to 64 pixels
Sharpness		Level adjustable
Defog		OFF/ON Level adjustable
Digital zoom		—
Privacy mask		8 masks
Mirror image		OFF, H-FLIP
Freeze		—
Motion detection		—
Neg.image		—
Interface		4P connector (Composite Video, Power in), 4P connector (DC iris), Remote control (RC-01)
Power supply		DC+12V±10%
Power consumption		1.02W (85mA)
Operating temperature		-10 - +50℃
Storage temperature		-30 - +70℃
Operating / Storage humidity		95% RH or less (Without condensation)
Lens mount		Φ14mm
Standard lens		f=2.8mm - 10.5mm F1.2 (2.8) Varifocal lens
Weight		Approx. 54g
Accessories		4P cable, Hex. Wrench

Accessories
 Options

