


WAT-704R/CB (G3.8) 1/4" Miniature Camera


Compact cylindrical camera with built-in lens & BNC output

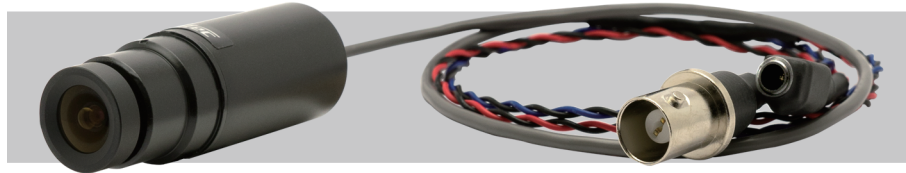

Key features

- Versatile use for limited space, general surveillance, embedded system
- Electric iris, AGC and BLC
- Various optional M13 lenses available ※Glass lenses and pinhole lens are not interchangeable

Dimensions

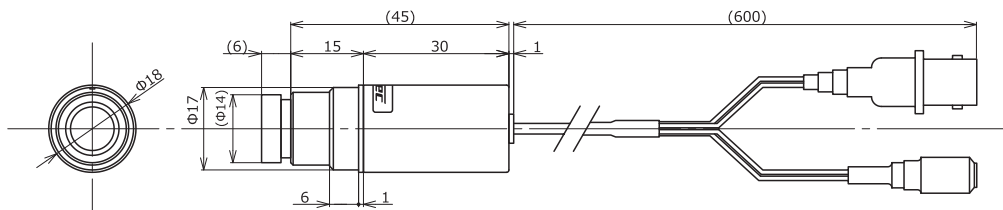

Specifications

Video standard		EIA	CCIR
Pick-up element		1/4 inch interline transfer CCD image sensor	
Number of effective pixels		510(H) × 492(V)	500(H) × 582(V)
Unit cell size		7.15μm(H) × 5.55μm(V)	7.3μm(H) × 4.7μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 380TVL (Center)	
Minimum illumination		0.08 lx F2.0 (AGC ON=32dB, Shutter=OFF)	
S/N		More than 46dB (AGC OFF=5dB, γ=1.0)	
Function settings		—	
AE mode	Fixed	—	
	EI	1/60 - 1/100000 sec.	1/50 - 1/100000 sec.
AGC	ON	5 - 32dB	
	OFF	—	
MGC		—	
Gamma characteristics		γ≈0.45	
Video level		100IRE	
Noise reduction		—	
Wide dynamic range		—	
Lens iris		—	
Back light compensation		BLC	
White blemish correction		—	
Sharpness		—	
Defog		—	
Digital zoom		—	
Privacy mask		—	
Mirror image		—	
Freeze		—	
Motion detection		—	
Neg.image		—	
Interface		BNC (Composite Video), Power in	
Power supply		DC+9V±10%	
Power consumption		0.95W (105mA)	
Operating temperature		-10 - +40℃	
Storage temperature		-30 - +70℃	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		M13 P=1.0	
Standard lens		3820B-13 (f3.8 F2.0)	
Cable length		600mm	
Weight		Approx. 32g	
Accessories		Ring holder	

Accessories Options

