


WAT-910HX MBD (G3.6) 1/3" Super High Sensitivity Miniature Board Camera

Ultra-compact design only 23 x 23mm for limited space and embedded application

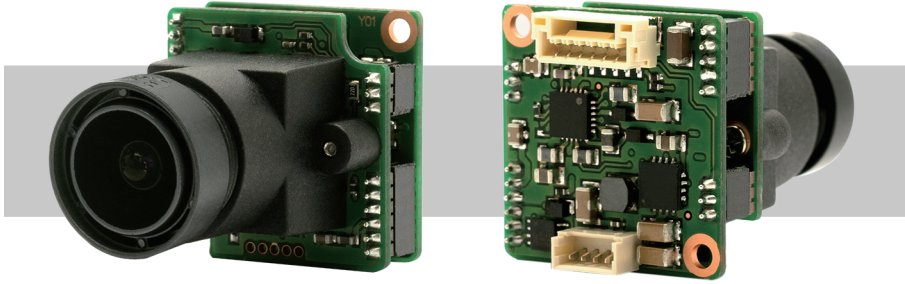


***NO CE & FCC**

Key features

- Min. illumination 0.00009 lx F2.0 (AGC ON=48dB, Shutter=x8)
- Advanced setting available by OSD (On Screen Display) through an optional remote control
- Build-in M12 lens G3.6 (f=3.6mm F2.0), Various Optional M12 lenses available
 - ※Glass lenses and pinhole lens are not interchangeable

Dimensions

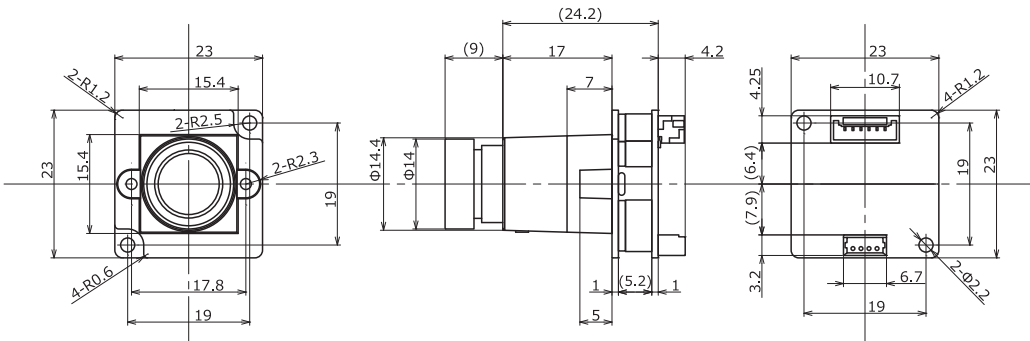

Specifications

Video standard		EIA	CCIR
Pick-up element		1/3 inch interline transfer CCD image sensor	
Number of effective pixels		768(H) × 494(V)	752(H) × 582(V)
Unit cell size		6.4μm(H) × 7.5μm(V)	6.5μm(H) × 6.3μm(V)
Synchronizing system		Internal	
Scanning system		2:1 interlace	
Video output		Composite video, 1.0 V(p-p) 75Ω (Unbalanced)	
Resolution (H)		More than 570TVL (Center)	
Minimum illumination		0.00009 lx F2.0 (AGC ON=48dB, Shutter=x8)	
S/N		More than 50dB (AGC OFF=6dB, γ=0.45, Shutter=OFF, NR=ON)	
Function settings		OSD : Remote controller	
AE mode	Fixed	x2, x4, x8, x16, x32, x64, x128, x256 (field)	
		1/60, 1/120 sec.	1/50, 1/100 sec.
		1/250, 1/500, 1/1000, 1/2000, 1/4000, 1/10000 sec.	
	EI	1/60 - 1/100000 sec.	1/50 - 1/100000 sec.
		x8 - 1/100000 sec.	
AGC	ON	0 - 48dB (Max. 6 - 48)	
	OFF	—	
	MGC	6 - 48dB (6dB step)	
Gamma characteristics		γ≒0.45	
Video level		Adjustable	
Noise reduction		3D+2DNR ON Level adjustable	
Wide dynamic range		D-WDR OFF/ON Level adjustable	
Lens iris		—	
Back light compensation		BLC, HSBLC	
White blemish correction		Up to 64 pixels	
Sharpness		Level adjustable	
Defog		OFF/ON Level adjustable	
Digital zoom		ZOOM (x1 - x256), PAN/TILT	
Privacy mask		15 masks	
Mirror image		OFF, V-FLIP, H-FLIP, HV-FLIP	
Freeze		—	
Motion detection		OFF/ON Select from 96 detection areas	
Neg.image		—	
Interface		4P connector (Composite Video, Power in), Remote control (RC-01)	
Power supply		DC+5V - 12V	
Power consumption		0.75W/150mA (DC+5V), 0.78W/65mA (DC+12V)	
Operating temperature		-10 - +50℃	
Storage temperature		-30 - +70℃	
Operating / Storage humidity		95% RH or less (Without condensation)	
Lens mount		M12 P=0.5	
Standard lens		M3620BC-12 (f3.6 F2.0)	
Weight		Approx. 14g	
Accessories		4P cable	

Accessories Options

